

# **Modernizations in the Post-pandemic World**

Rory Smith

The University of Northampton, Northampton, UK

**Abstract.** Modernization has been a part of the lift industry for a very long time. There are buildings that are over 100 years old that have been modernized multiple times but continue to use the original direct current machine. Both societal changes and technical innovations will make the modernizations of the very near future different from the modernizations of the present. The motivations for modernization, the societal changes, and the technical innovations will be reviewed. The benefits of the next generation modernization will also be explored.

**Keywords:** Modernization, Post-Pandemic Workplace, Societal Changes, Innovation.

## **1 INTRODUCTION**

Buildings, like most other products, compete with other buildings for customers. In the case of buildings, the customers are the entities who lease or buy the space in the building. While there are many factors that affect the customer's decision, some of the most important factors are location, price, and building features.

New buildings have all the latest features. Existing buildings must upgrade their systems or accept lower rents. It is for this reason that buildings have modernized their lifts in the past. However, that was before COVID-19.

The post-pandemic commercial real estate market will also see changes in building use and building specifications. These changes will affect lift requirements and create new lift modernization opportunities, even for relatively new buildings that were completed just before or during the pandemic.

Future modernizations will need to address the following two requirements:

1. Post-pandemic workplace requirements.
2. New technologies.

The pool of existing buildings that must modernize to compete with new buildings is large. The following are three examples:

1. At the end of 2020, the average commercial building in the USA was 52.67 years old [1].
2. In Europe, 80% of existing commercial buildings were built before 1990 [2].
3. China's period of reform and reopening began in 1978. Many of the buildings built in the first 20 years of this period will need to be modernized [3].

## **2 THE POST PANDEMIC WORKPLACE**

### **2.1 Societal change, working remotely**

Businesses have learned that people can work productively from remote locations such as home offices. However, teamwork, collaborative efforts, mentoring, and the development and maintenance of corporate culture requires people to work together in the same location [4].

The question that the real estate industry is trying to answer is, "How many people will ultimately continue to work remotely and how many people will return to the office?" Industry leaders are

forecasting that between 60% to 80% of the workforce will return to the office [5] [6]. However, many people will utilize a hybrid solution of working some days of the week in the office and some days of the week from a remote location.

If 80% of the workforce returns to the office, it would appear there will be a very large surplus of office space and, consequently, vacancy rates will increase. However, it also appears that the workforce wants to continue to exercise social distancing. Additionally, workers have found open office spaces are less productive because it is difficult to concentrate in such an environment [4].

Because working remotely will create some level of surplus office space. It is possible that some office buildings will be converted to residential buildings. In fact, the author has been informed by a lift consultant that his firm is working on two projects where an office building is being converted to a mixed-use building that includes both office space and residential units.

## **2.2 Touchless**

Contacting a contaminated surface is one way that COVID-19 and many other bacterial and viral diseases can be transmitted. Touching a lift push button or grabbing an escalator handrail are correctly perceived to be good ways to spread disease. As a result, many lift companies are offering touchless solutions for lifts and handrail sanitizing devices for escalators [7] [8].

Traditional lift control systems use up and down pushbuttons in the hall to call a lift. When a lift arrives, one must enter their destination on a pushbutton panel in the cabin.

Destination Dispatch systems inherently are more “touchless” than conventional control systems with up and down buttons because one must only enter their destination from the hall [9]. Using smart devices such as mobile phones, ID badges and facial recognition systems make it possible to have a completely touchless lift.

The touchless controls that use smart devices also know who is using the lift. This information can be useful in the following ways:

1. Reducing “Tailgating”, the practice of entering one’s destination multiple times in sequence.
2. Reduced abuse of the impaired mobility function.
3. Contact tracing. Identifying passengers who rode in the same car as an infected person.

It is often not necessary to replace a control system to upgrade to a touchless Destination Dispatch system. Many companies are offering Destination Dispatch overlay systems [10].

One can therefore expect there will be an increase in control system modernizations or upgrades to touchless Destination Dispatch systems.

For safety, escalator users are encouraged to hold the handrail. Since a touchless handrail is not possible, two solutions are currently being offered: Ultra-violet C sanitizers and handrails with anti-microbial coatings [8]. It is logical to expect that many escalators will be upgraded by installing these devices.

## **2.3 Cabin space**

Personal space has always defined the number of passengers that a lift car could transport [11]. A value of 0.21m<sup>2</sup> per person is commonly used. However, in the post-COVID-19 world, it is anticipated that this value will increase.

## 2.4 Traffic handling: Touchless & 80% occupancy

The combination of reduced passengers per floor, increased personal space in cabins, and the use of contactless destination dispatch controls will have an impact on the traffic handling capacity of a lift system.

The overall impact of these factors can be evaluated using simulation. Two traffic conditions will be evaluated:

1. Morning Up Peak.
2. Lunch Period.

These two traffic conditions are the most intense traffic periods in a modern office building. These are the periods when the lift cars will have the largest number of passengers traveling simultaneously [12].

The traffic simulations will be performed for a hypothetical building designed before the arrival of COVID-19. Pre-pandemic there were 54 persons per floor and the control system was Group Collective with up and down buttons in the hall. Post-pandemic, the same building is fitted with a touchless Destination Dispatch system where only 80% of the occupants returned to the building, 43 persons. The building's characteristics pre-pandemic and post-pandemic are summarized in Table 1.

Table 1 – Building characteristics

	<b>Pre-Pandemic</b>	<b>Post Pandemic</b>
<b>Floors</b>	18	18
<b>Number of Lifts</b>	6	6
<b>Capacity (kg)</b>	1350	1350
<b>Speed (m/s)</b>	3	3
<b>Control System</b>	Group Collective	Destination Dispatch
<b>Persons/Floor</b>	54	43

The lift system for this hypothetical building had been designed using the General Analysis Up Peak Calculation method [11]. This system had an interval of 30.5 seconds with a 5-minute arrival rate of 12% of the building's population. The building had an adequate lift system.

The pre-pandemic system uses a Group Collective control system, a system that uses up and down buttons, whilst the post pandemic system uses Destination Dispatch, a touchless destination entry system.

Destination Dispatch systems have much more information about passengers than traditional systems [9]. With traditional systems, when an up call is placed in the lobby, all that is known is that one or more persons wants to travel from the lobby to an upper floor. With Touchless Destination Dispatch systems each person enters their destination from their departure floor. Therefore, the system not only knows where the passenger wants to travel, it also knows how many people are traveling.

Example 1. Morning Up Peak Traffic

The two systems were evaluated using ELEVATE® simulation software and applying the CIBSE Modern Office Up Peak template [13].

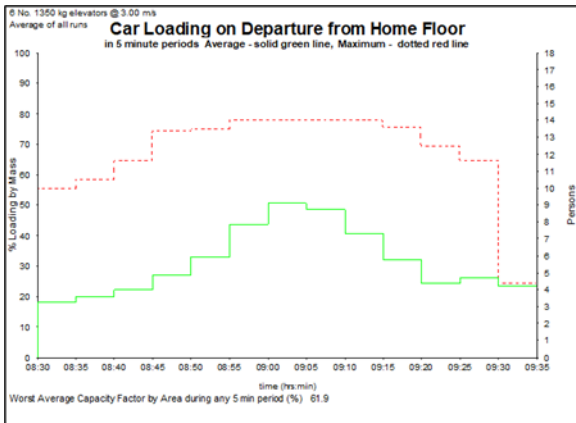


Figure 1 – Car Loading Pre-Pandemic

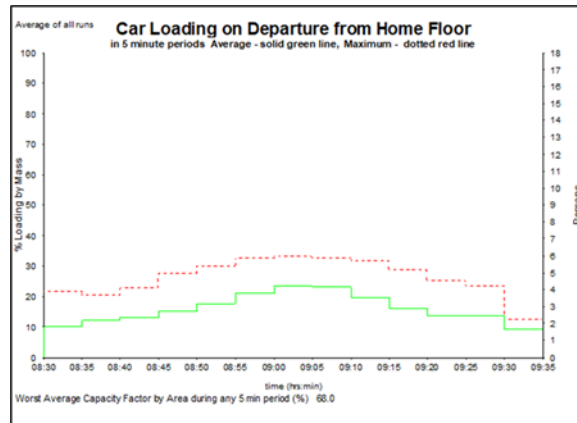


Figure 2 – Car Loading Post Pandemic

In Figure 1, the worst average car loading during any 5-minute period was 9 persons. In Figure 2, the worst average car loading was only 4 persons.

The performance times for the two systems can be seen below in Table 2.

Table 2 - Up Peak

<b>Group Control</b>		<b>Destination Dispatch</b>	
<b>Performance Times</b>		<b>Performance Times</b>	
Average Waiting Time:	9.3 sec	Waiting Time:	19.0 sec
Average Transit Time:	70.0 sec	Average Transit Time:	36.0 sec
Average Time to Destination:	79.3 sec	Average Time to Destination:	55.0 sec

Waiting time is the time spent waiting in the lobby for the lift to arrive.

Transit Time is the time spent riding in the lift. Transit time should be viewed as Exposure Time. It is during this time-period that a passenger can be exposed to disease pathogens.

### Example 2. Lunch Period

The two systems were evaluated using ELEVATE® simulation software and applying the CIBSE Modern Office Lunch Peak template [13].

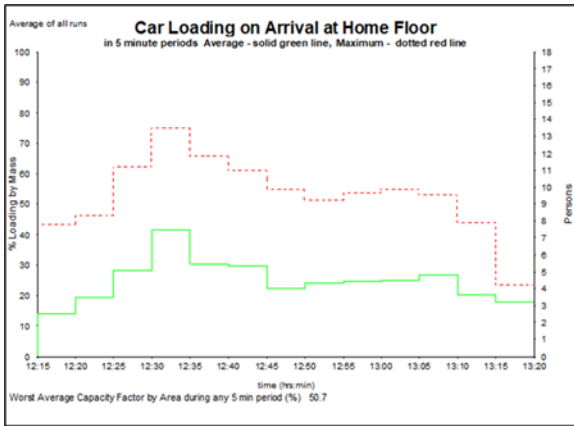


Figure 3 - Car Loading Pre-Pandemic

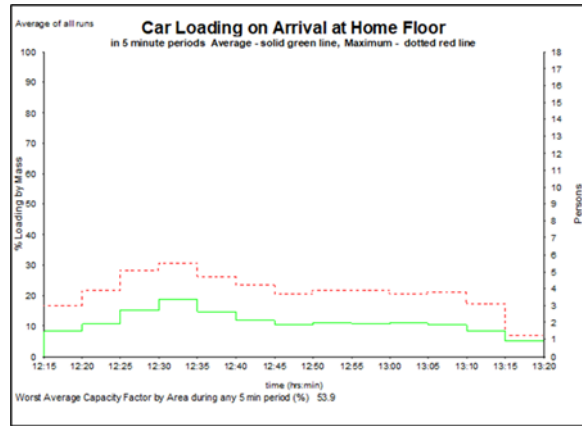


Figure 4 - Car Loading Post Pandemic

In Figure 3, the worst average car loading during any 5-minute period was 7 persons. In Figure 4, the worst average car loading was only 3 persons.

The performance times for the two systems during lunch can be seen below in Table 3.

Table 3 Lunch

<b>Group Control</b>		<b>Destination Dispatch</b>	
<b>Performance Times</b>		<b>Performance Times</b>	
Average Waiting Time:	24.3 sec	Average Waiting Time:	26.8 sec
Average Transit Time:	64.4sec	Average Transit Time:	35.4 sec
Average Time to Destination:	89.7 sec	Average Time to Destination:	62.2sec

During both time periods, the Post Pandemic Exposure Time was greatly reduced while number of people riding in the cabin was more than cut in half.

One can see that the existing lifts with new controls, when applied with post pandemic conditions, had improved traffic handling performance, fewer people in the car, and reduced Exposure Time.

## 2.5 Ventilation

Traditionally, there have been two approaches to forced cabin ventilation:

1. Extraction. Ceiling fans extract air from inside the cabin and vent it into the hoistway.
2. Supply. Ceiling fans force air from the hoistway into the cabin.

In response to COVID-19, lift companies are offering supply type ventilation systems that pass the air either through an ionization chamber or an ionization chamber combined with a filter [8] [14]. Ionized oxygen, nitrogen and water vapour will neutralize viruses such as COVID-19 and bacteria.

Passengers can still spread disease by sneezing or talking, but these systems ensure that the air entering the cabin is sanitary and the ionized gasses and vapor will kill some of the pathogens and the air flow will prevent remaining contaminants from lingering in the cabin.

At least one lift company is offering a UV-C air purification system that circulates the cabin air through a UV-C device [15].

### **3. NEW TECHNOLOGIES**

Future modernizations will be driven not only by the post pandemic workplace but also by new technologies. There are two technologies that will create a demand for future modernizations or system enhancements. These technologies are Connectivity and Machine Learning.

#### **3.1 Connectivity**

Connectivity, as it relates to Information Technologies, is defined as “the ability to connect to or communicate with another computer or computer system” [16].

For the lift industry it typically signifies that the lift control system is connected to a remote computer using cloud technologies. The information sent from the controller can be used for many things including Machine Learning, interfaces to other building systems, applications (Apps) used by building managers, and Apps used by lift passengers.

Connectivity systems that connect directly to the control system are available for most new or recently installed lifts.

Existing lifts can be connected using sensor packages that require little or no connection to the control system. Using one of the many commercially available connectivity systems, virtually any lift can have some level of connectivity [17].

The data from the connectivity system can be processed and made available to other computer programs by way of an API.

An API is an Application Programming Interface [18]. A User Interface (UI) allows a person to communicate with a computer. An API lets a computer communicate with another computer.

The following are some examples of computer systems that may want to access a lift system’s API:

1. A Building Management System (BMS) computer.
2. A security system computer.
3. A facilities management company’s computer.
4. A service robot that wants to use the lift.
5. A government agency computer.

Apps are Applications that can be downloaded onto a mobile device such as a smartphone or a tablet [19]. Apps receive much of their information from API’s. Apps for lifts are user interfaces that permit service personnel, passengers, and building managers to access data about or communicate with lifts and escalators. The following are some examples of lift apps:

1. App to place calls in a destination dispatch system.
2. App to help service personnel diagnose lift problems.
3. App for facility managers and building engineers to receive performance data and alarms about their lifts and escalators.

Connectivity will only be possible if lifts and escalators are upgraded or modernized. Upgrading can be as simple as adding a modem and software or it can be complex depending on the existing control system and its vintage.

### **3.2 Machine learning and Artificial Intelligence**

The goal of Artificial Intelligence (AI) is to develop computers and software that mimic human intelligence. Machine Learning (ML) is one form of Artificial Intelligence (AI). Machine Learning involves making predictions based on properties learned from data [20].

There are many forms of ML. The following are two forms that can be used for lifts:

1. Classification and Regression Trees (CART).
  - a. Description: These trees are decision trees that learn from what has occurred in the past and use that knowledge to make predictions about future outcomes [21].
  - b. Example: The output of a lift remote monitoring system records what has happened in the past. Analysing this data using CART might reveal a sequence of events and or error codes that almost always leads to a shutdown within two weeks.
2. Artificial Neural Networks (ANN)
  - a. Description: ANN's are computing systems inspired by biological neural networks such as human and animal brains [22]. These networks have the ability to learn.
  - b. Example: An ANN is shown the vibration signature of a properly functioning lift component and told it is the signature of an undamaged component. It is also shown the vibration signature of a damaged component and told it is the signature of a damaged component. Many vibration signatures are shown to the ANN and in time the ANN learns to identify damaged components by their signature.

Because of its ability to learn and predict, Machine Learning will make possible tremendous improvements in reliability and maintenance efficiency [23]. Soon it will be possible to almost eliminate lift breakdowns completely except those caused by external factors such as misuse, abuse, vandalism or acts of God.

Building owners and managers want the improvement in up time that is made possible by Machine Learning. Part of that improvement will come from improved service operations and part will come from product improvements. ML can easily identify problematic components. and generally requires connected lifts and escalators.

## **4. CONCLUSIONS**

The modernizations of the future will be driven by societal changes and innovation.

The societal changes are the result of our experience with the COVID–19 pandemic. Society knows how to work remotely at least a portion of the time and that we are more comfortable with greater personal space and less contact with potentially contaminated surfaces.

Building owners, building managers, and building occupants want the benefits made possible by connectivity.

Even recently completed or modernized lifts are candidates for additional upgrades to deal with the changing workplace. The market for lift modernizations and upgrades has never been better.

## REFERENCES

- [1]. Feldstein, S. 2020, *Research Commentary*. Available from: <https://commbuildings.com/ResearchComm.html>. Last accessed: 27 June 2021.
- [2]. *IREsIST+* Innovative seismic and energy retrofitting of the existing building stock. Available from: [https://ec.europa.eu/jrc/en/research-topic/improving-safety-construction/i-resist-plus?qt-news\\_events\\_tabs\\_on\\_basic\\_pages=1](https://ec.europa.eu/jrc/en/research-topic/improving-safety-construction/i-resist-plus?qt-news_events_tabs_on_basic_pages=1) Last accessed: 27 June 2021
- [3]. *Forty years of reform and opening up: China's progress toward a sustainable path*. Available from: <https://advances.sciencemag.org/content/5/8/eaau9413.full#:~:text=The%20year%202018%20marks%20the%2040th%20anniversary%20of,at%20the%20crossroad%20of%20a%20future%20development%20alternative> Last accessed: 27 June 2021.
- [4] *Reimagining the office*. Available from: [https://www.kone.com/en/Images/Reimagining-the-Office\\_FINAL\\_100dpi\\_tcm17-104272.pdf](https://www.kone.com/en/Images/Reimagining-the-Office_FINAL_100dpi_tcm17-104272.pdf). (Accessed 6 December 2021)
- [5] *RXR Realty CEO Scott Rechler on his outlook for return to the office*. Available from: <https://www.cnbc.com/video/2021/06/18/return-to-the-office-commercial-real-estate.html> . (Accessed: 24 June 2021)
- [6] *What employers need to know about managing hybrid work environments*. Available from: <https://www.cnbc.com/video/2021/05/25/return-to-office-hybrid-model-post-pandemic.html> . (Accessed: 24 June 2021)
- [7] *Gen3 Brochure*. Available from: [https://www.otis.com/documents/256045/333123909/OTIS\\_Gen3Brochure\\_Eng\\_Final.pdf/b842c11e-a85a-0b5d-4a2f-5d64d854b4e0?t=1621911510749](https://www.otis.com/documents/256045/333123909/OTIS_Gen3Brochure_Eng_Final.pdf/b842c11e-a85a-0b5d-4a2f-5d64d854b4e0?t=1621911510749) . (Accessed: 29 June 2021)
- [8] *Sanitizing Products*. Available from: <https://www.otis.com/en/us/tools-resources/safety-products-features/escalator-sanitizing-products> . (Accessed: 26 June 2021)
- [9] Smith R. Method and apparatus for assigning hall calls to one of a plurality of elevator cars European Patent 1385771 2012
- [10] *KONE Modernization Overlay*. Available from: [https://www.kone.sa/en/Images/Modernization\\_Overlay\\_factsheet\\_tcm262-78820.pdf](https://www.kone.sa/en/Images/Modernization_Overlay_factsheet_tcm262-78820.pdf) . (Accessed: 29 July 2021)
- [11] G. Barney et. al. *Transportation Systems in Buildings CIBSE Guide D*. CIBSE: 2020



- [12] Peters R, Smith R, Evans. The Appraisal of Lift Passenger Demand in Modern Office Buildings *Building Services Engineering Research and Technology*. Volume 32 No 2, May 2011. <https://doi.org/10.1177/0143624410385378>
- [13] Peters Research. ELEVATE (Version 8.28) [Software] Peters Research Ltd. 2007.
- [14] *VFA Solutions*. Available from: <https://www.vfa-solutions.com/en/our-technology/aspra-air-purification/>. (Accessed: 26 June 2021)
- [15] *UV Clean Air*. Available from: <https://www.jardineschindler.com/en/elevators/cleanmobility/uv-cleanair.html> (Accessed 27 February 2022)
- [16] *Connectivity*. Available from: <https://www.merriam-webster.com/dictionary/connectivity>. (Accessed: 27 2021)
- [17] Smith R. IOT, *Magic or Myth* (2020) In: Proceedings of the 11th Symposium on Lift and Escalator Technologies, Northampton
- [18] *API*. Available from: <https://en.wikipedia.org/wiki/API>. (Accessed: 28 June 2021)
- [19] *Apps* Available from: <https://www.merriam-webster.com/dictionary/app> (Accessed: 2 June 2021)
- [20] *Machine Learning*. Available from: [https://en.wikipedia.org/wiki/Machine\\_learning](https://en.wikipedia.org/wiki/Machine_learning). (Accessed: 24 July 2021)
- [21] *Decision Tree Learning* Available from: [https://en.wikipedia.org/wiki/Decision\\_tree\\_learning](https://en.wikipedia.org/wiki/Decision_tree_learning). [Accessed: 24 July 2021]
- [22] *Artificial Neural Networks*. Available from: [https://en.wikipedia.org/wiki/Artificial\\_neural\\_network](https://en.wikipedia.org/wiki/Artificial_neural_network) (Accessed: 26 July 2021)
- [23] Smith R. *The Internet of Things, Big Data, Machine Learning, and the Lift & Escalator Industry*. In: Proceedings of the 5th Symposium on Lift and Escalator Technologies, Northampton; 2015 p.203-207.